



BBI
RANGE

HARWIN

FLECTO

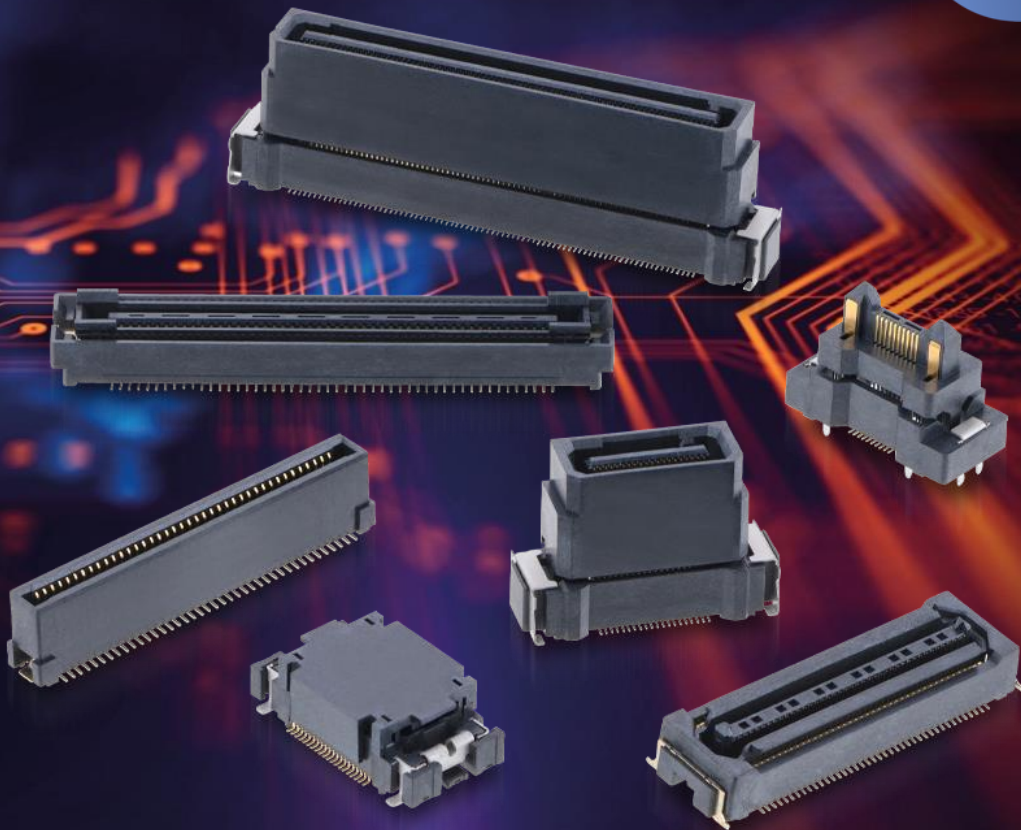

SMALLER CONNECTIONS FOR THE INDUSTRY

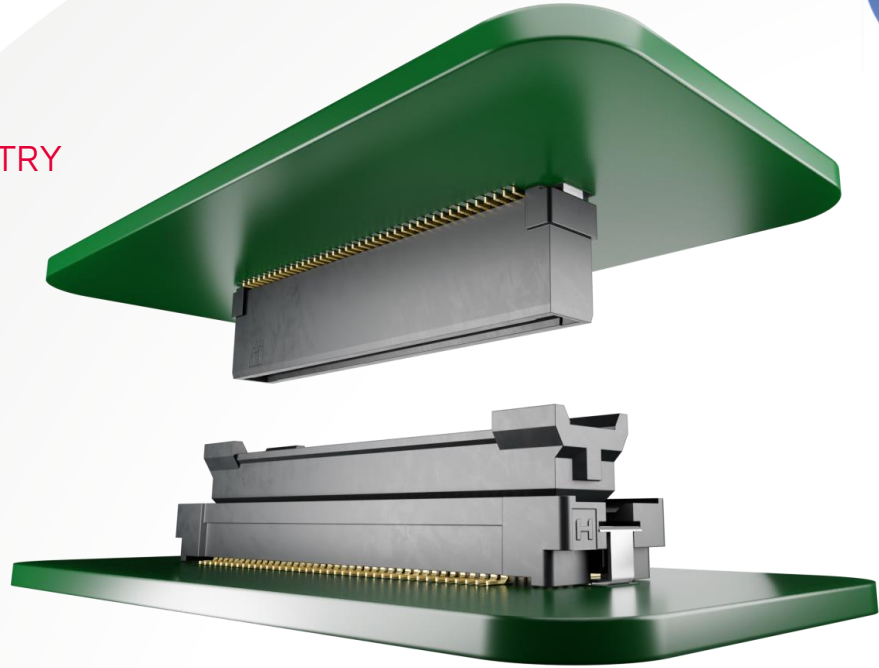

Industrial and automation systems require more features, but control modules must occupy less space. Hand-held products for both Consumer and Business must be compact but highly capable. These needs result in stacked boards with multiple micro-pitch connections.

[Flecto Floating Connectors](#) allow for multiple connectors between the same two PCBs, without the issue of placement accuracy.


FLOATING BOARD-TO-BOARD CONNECTIONS



When you have two connectors mating the same two PCBs, the tolerance of the product location (whether from PCB manufacture, paste location, pick and place accuracy or a combination of these) can mean that one or both connectors will encounter additional side-loading. This has the risk of long-term stress and damage on the connectors.

Flecto connectors eliminate this, with the male mating contact areas able to “float” within the housing.



FEATURES – TOLERANCE TO MISALIGNMENT

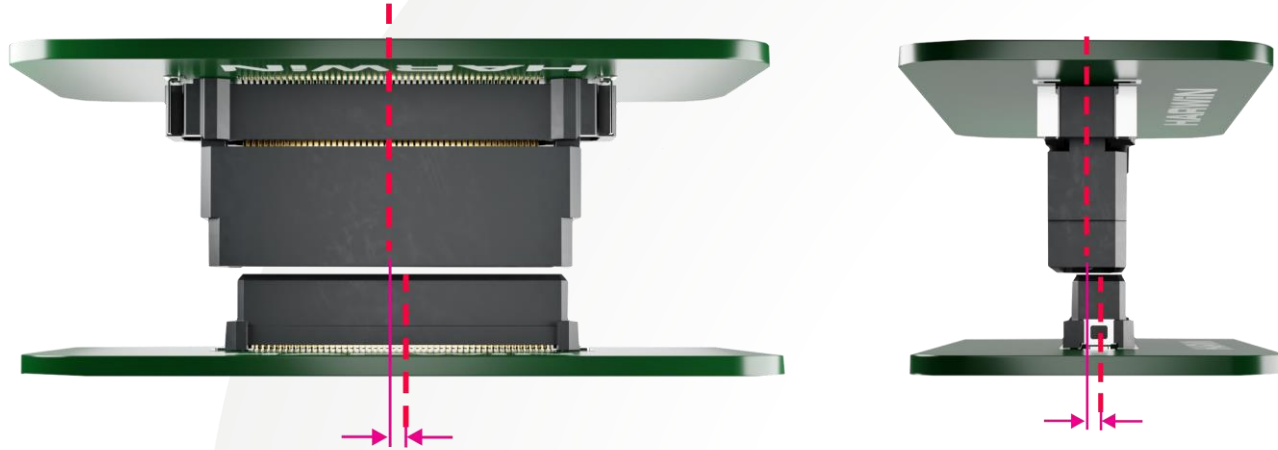

The connectors can be offset before mating by up to 0.5mm (up to 0.8mm for some ranges). This eliminates connection issues caused by placement tolerances and solder misalignment problems.


Any stresses are eased by the movement of the male connector, and the mating process during equipment assembly is easier and faster.

FEATURES – TOLERANCE TO MISALIGNMENT

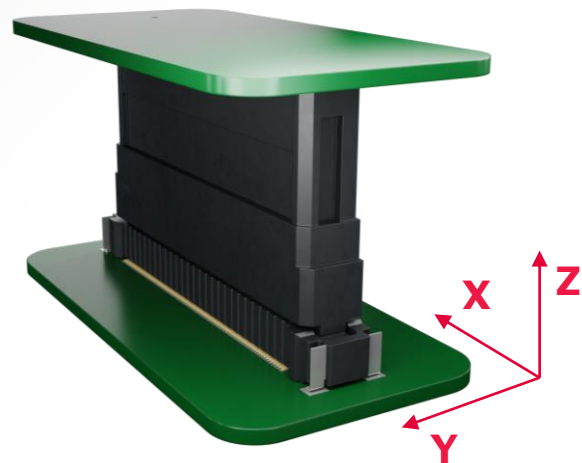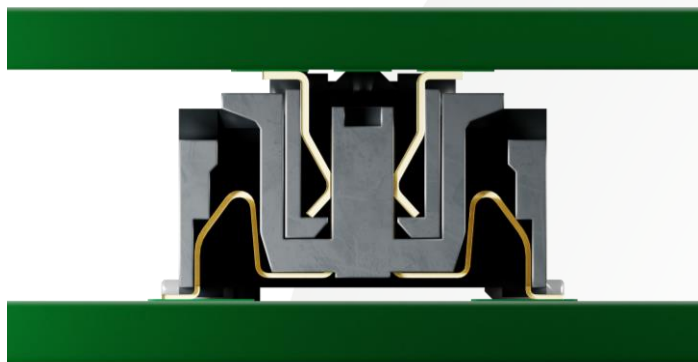

The connectors can also be offset when mated. The “floating” section in the male connector enables up to $\pm 0.5\text{mm}$ of movement in the X, Y and Z axes (up to $\pm 0.8\text{mm}$ in X and Y for some ranges). This allows for multiple connectors mating between two PCBs, as all placement tolerances and solder misalignment problems are absorbed within the floating movement.

FEATURES – UP TO 12Gbit/s DATA RATE

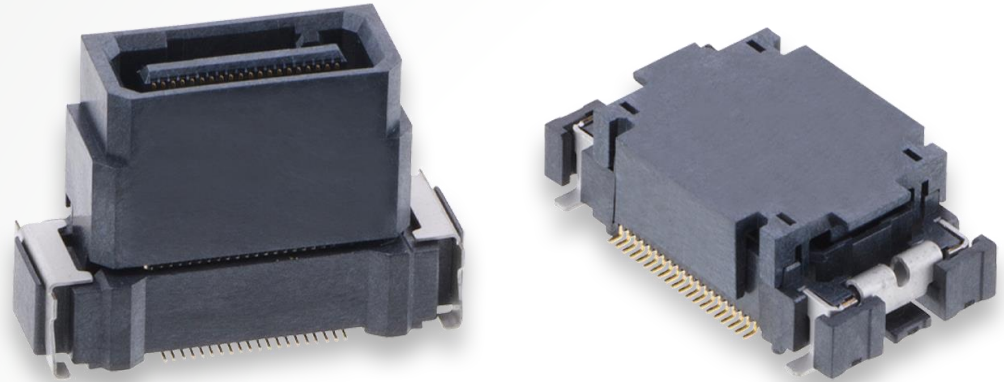


By using insertion loss and Near End Cross Talk (NEXT) testing methods, a conservative estimate of the data rate for mated connectors is established at:

- **4GHz, 8Gb/s** for 0.50mm (.0197") pitch
- **6GHz, 12Gb/s** for 0.635mm (.025") pitch
- **2.5GHz, 5Gb/s** for 0.8mm (.0315") pitch

Further information and test result graphs can be found in the [HT090 Test Report Summary](#).


FEATURES – SHROUDING AND POLARIZATION

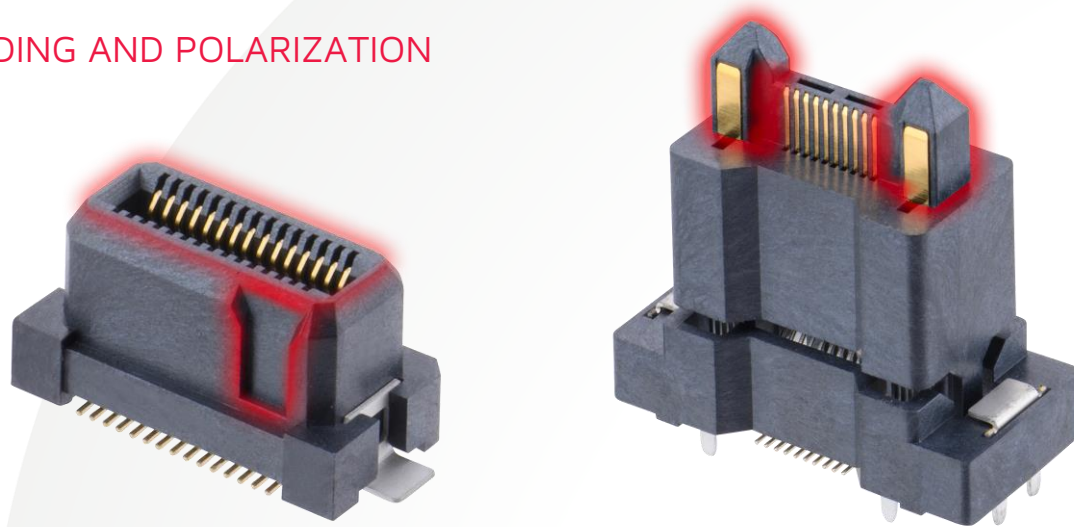

Some connectors in this range feature shrouded contacts, to prevent accidental damage to the miniature contacts. Some designs include polarization within the shroud to ensure assembly in only one direction. Check the individual product pages to confirm shrouding and polarization.


When power pins are included, they are located on large posts on the male side. This assists with blind mating, where visibility during the mating action is obscured or absent.

FEATURES – SURFACE MOUNT RETENTION TABS AND PEGS

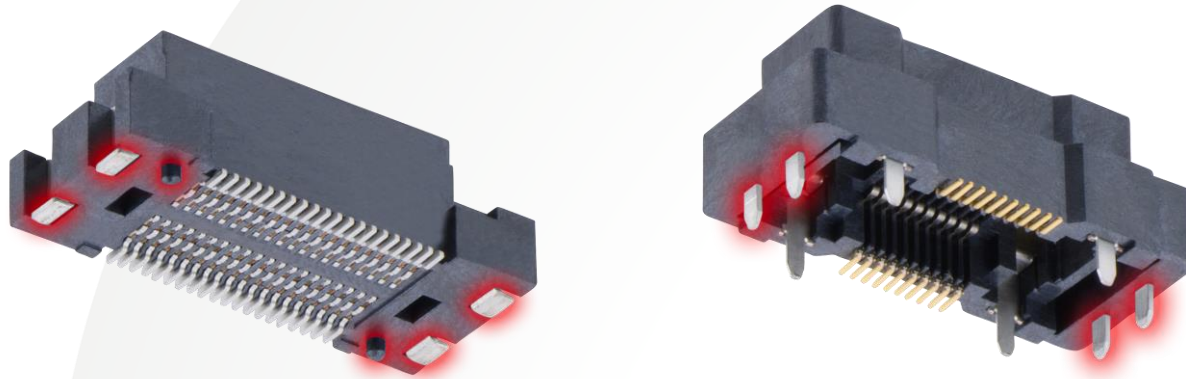

To assist with correct board placement, all signal-only connectors feature location pegs or posts to inhibit movement during the solder process. To improve surface mount retention to the PCB, retention tabs are located on either end of the connectors which provide additional solder strength.


Connectors including power pins have throughboard solderable posts for both location and additional solder strength.

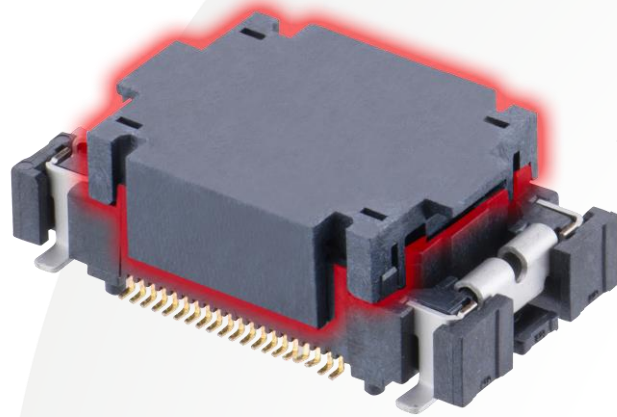READY FOR AUTO-PLACEMENT


All Male and Female connectors are available in Tape and Reel packaging options, ready to facilitate automated assembly processes to the PCB. All signal terminations are SMT, all power terminations are throughboard.

The vertical connectors are fitted with disposable pick-and-place caps or tape – for the horizontal connectors, there is already a suitable flat surface on the connector itself.


FINE PITCH OPTIONS

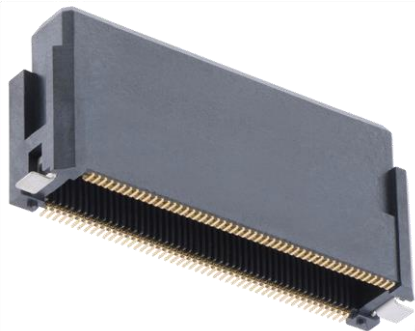


F10/F12: 0.50mm

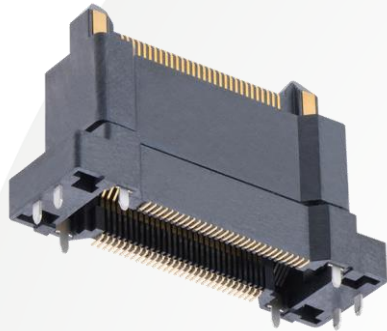

F11: 0.5mm

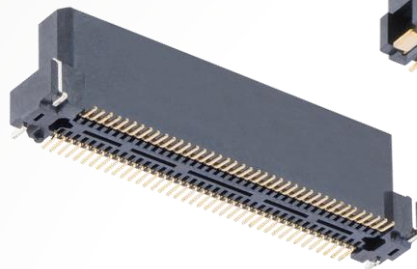

F20: 0.635mm

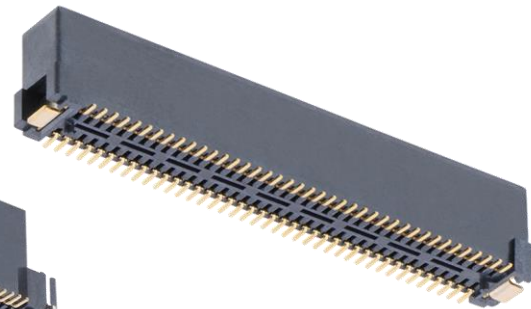


F30: 0.80mm

Flecto is available in 3 different pitches, with the smallest pitch also available with power pins:

- **F10 and F12 series** = 0.50mm (.0197") pitch - all signal, F10 does not mate with F12
- **F11 series** = 0.5mm (.0197") pitch - signal + power
- **F20 series** = 0.635mm (.025") pitch
- **F30 series** = 0.80mm (.0315") pitch


F10 SERIES – 0.5mm PITCH: VARIABLE HEIGHTS, ALL SIGNAL

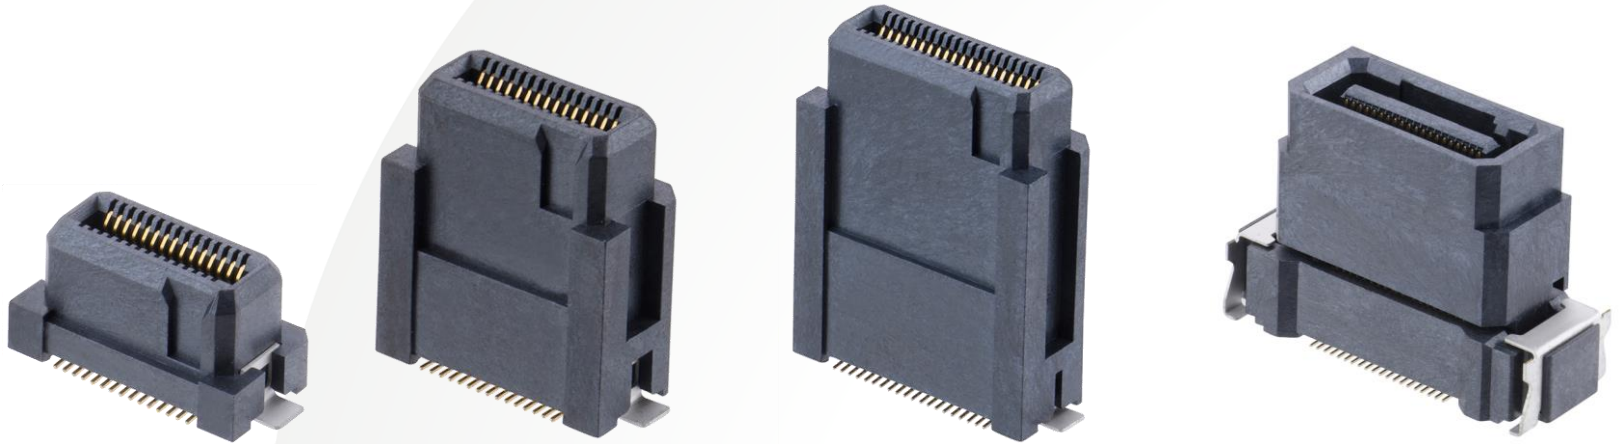

The F10 range has 3 different heights in the female connector, and the male connector incorporates the floating mechanism.

- **F10-100xxx45R** = Female SMT 6.40mm – mating height is 17.90mm nominal – 30 and 100 contact options
- **F10-101xxx45R** = Female SMT 13.40mm – mating height is 24.90mm nominal – 30 and 100 contact options
- **F10-102xxx45R** = Female SMT 18.40mm – mating height is 29.90mm nominal – 30 / 40 / 60 / 80 / 100 / 120 / 140 / 160 contact options
- **F10-200xxx45R** = Male SMT – mating height is dependent on female connector – 30 / 40 / 60 / 80 / 100 / 120 / 140 / 160 contact options

F11 SERIES – 0.5mm PITCH: VARIABLE HEIGHTS, SIGNAL + POWER

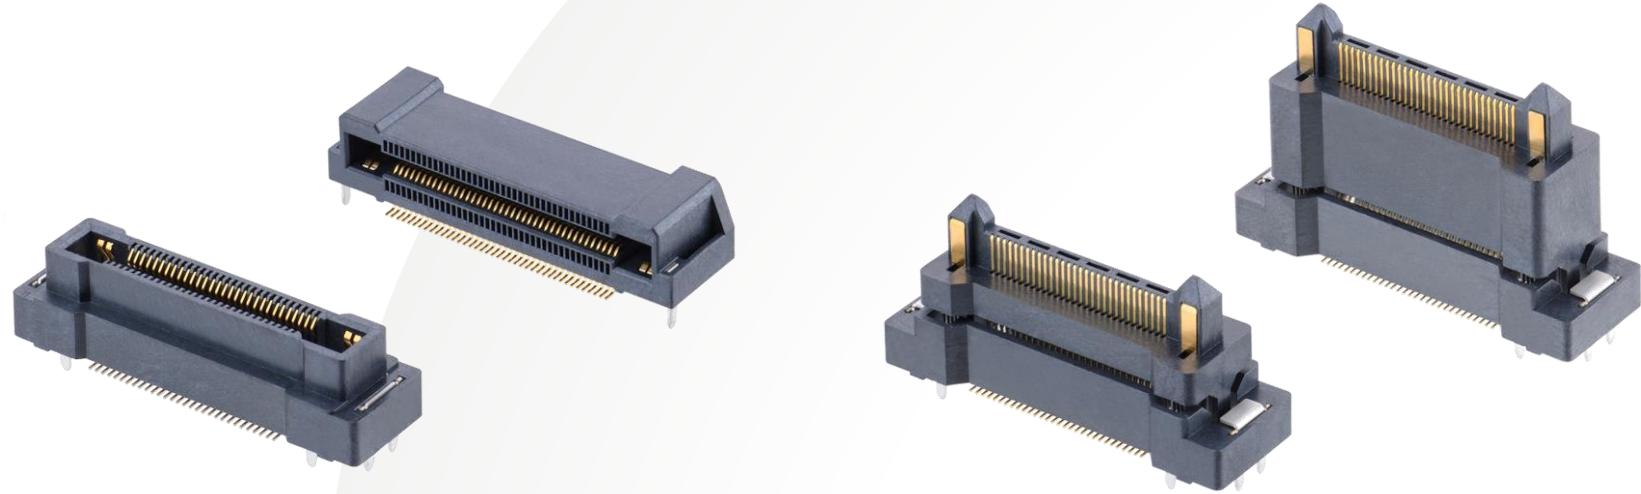

Female connectors are supplied in vertical or horizontal format. The 4 power contacts are located around the 2 mating posts on the male connector, internal contacts on the female. The male connectors have 2 different heights and incorporate the floating mechanism. Signal contact counts options are 20 / 40 / 60 / 80 / 100 / 120.


Female connectors:

- **F11-100xxx42R** = Vertical
- **F11-111xxx42R** = Horizontal (90°)

Male connectors:

- **F11-200xxx42R** = 13.20mm high, 15.00mm nominal mating height with F11-100
- **F11-201xxx42R** = 18.20mm high, 20.00mm nominal mating height with F11-100


F12 SERIES – 0.5mm PITCH: COMPACT MATING HEIGHT

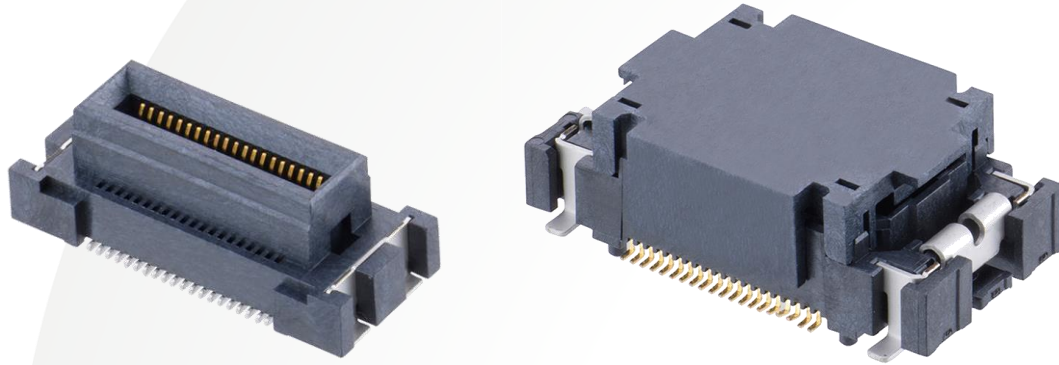

The F12 mating connectors are suitable for a smaller board-to-board height requirement with a nominal mated height of 7.65mm. Available with 40 contacts.

- **F12-10004042R** = Female SMT
- **F12-20004045R** = Male SMT


F20 SERIES – 0.635mm PITCH: VARIABLE HEIGHTS, ALL SIGNAL

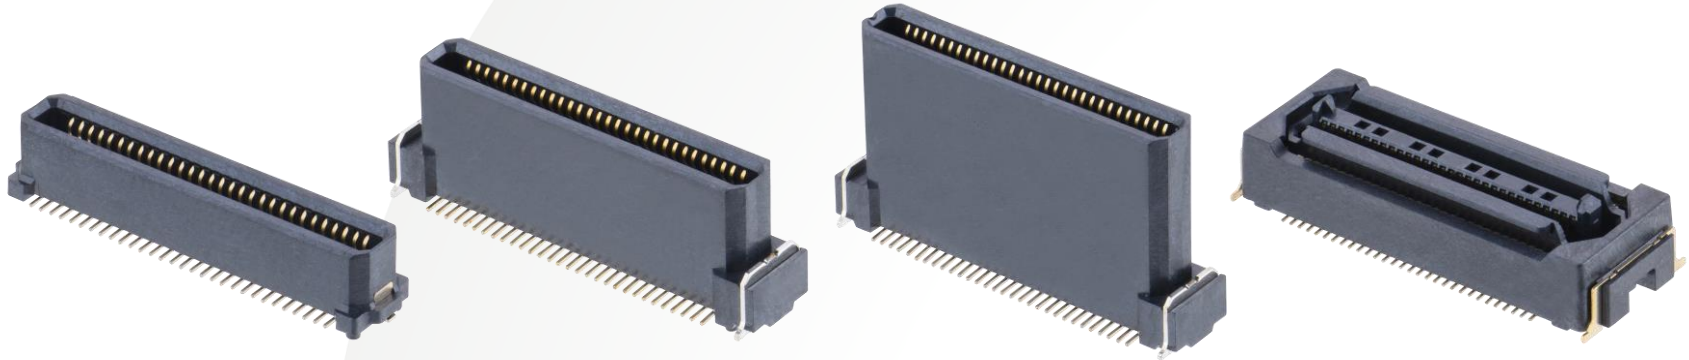

The F20 range also has 3 different heights in the female connector, and the male connector incorporates the floating mechanism. 60 and 80 pin counts are available.

- **F20-100xxx45R** = Female SMT 4.28mm – mating height is 5.98mm nominal
- **F20-101xxx45R** = Female SMT 8.18mm – mating height is 9.88mm nominal
- **F20-102xxx45R** = Female SMT 13.18mm – mating height is 14.88mm nominal
- **F20-200xxx45R** = Male SMT – mating height is dependent on female connector

F30 SERIES – 0.8mm PITCH: VARIABLE HEIGHTS, ALL SIGNAL

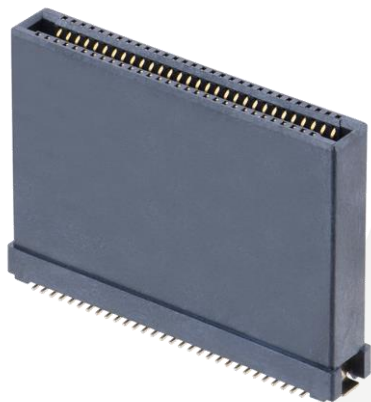

Nominal mating heights		MALE	
		F30-200	F30-201
FEMALE	F30-100	8.00mm	11.75mm
	F30-101	9.00mm	12.75mm
	F30-102	20.95mm	24.70mm



The F30 range has 3 different heights in the female connector, and 2 different heights in the male connector, which also incorporates the floating mechanism.

Female connectors:

- **F30-100xxx45R** = 6.80mm high, 60 or 80 contacts
- **F30-101xxx45R** = 7.80mm high, 60 or 80 contacts
- **F30-102xxx45R** = 19.75mm high, 60 / 80 / 100 contacts

Male connectors:

- **F30-200xxx45R** = 4.70mm high, 60 / 80 / 100 contacts
- **F30-201xxx45R** = 8.45mm high, 60 or 80 contacts

ELECTRICAL SPECIFICATIONS

Current Rating	Signal Contacts = 0.5A per contact (0.4A for F10/F12 series) Power Contacts = 3A per contact
Contact Resistance	100m Ω max
Insulation Resistance	100M Ω min

View the [C057XX Component Specification](#) for more detail.

MECHANICAL & ENVIRONMENTAL SPECIFICATIONS

X, Y and Z Axis movement / misalignment	Z axis = ±0.5mm (all ranges) X / Y axes for F10, F12, F30-200 = ±0.5mm X / Y axes for F20 = ±0.7mm X / Y axes for F30-201 = ±0.8mm
Temperature Range	Signal + Power (F11 series) = -55°C to +105°C Signal Only = -40°C to +105°C
Durability	100 mating cycle operations min (F10, F11, F20, F30) 30 mating cycle operations min (F12)

The complete product range is manufactured using LCP housings and copper alloy contacts.


Maximum recommended solder temperature (soldering heat resistance) is 260°C for 10 seconds.

LEGISLATION – ENVIRONMENTALLY FRIENDLY MATERIAL



The materials used in the Flecto connectors do not contain any Lead, Brominated Flame Retardants, Red Phosphor (PFOS/PFOA) or Antimony; they are Halogen-free. They are fully RoHS Compatible and contain no REACH SVHCs.

MARKETS

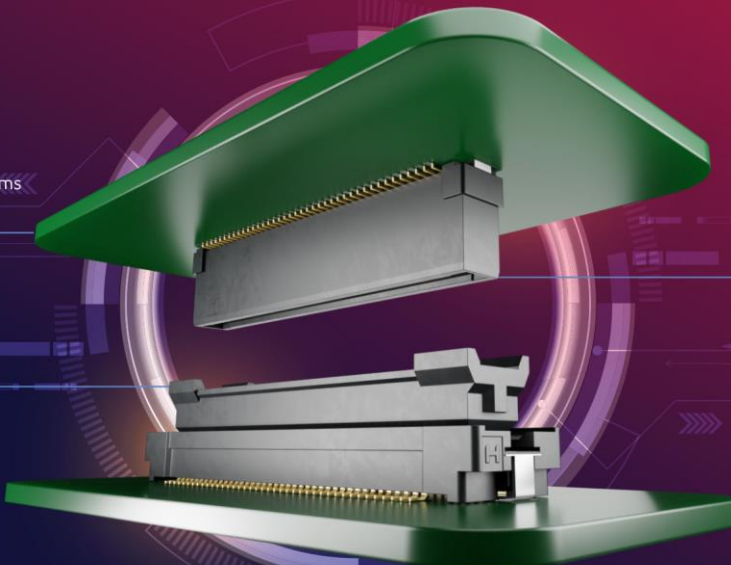

Electric Vehicles

- Infotainment systems
- Inverter units
- Battery Management Systems
- LIDAR

Smart Factory

- Factory Automation
- Drives & Controls
- Robotics
- Sensor Units
- Vision Systems

Embedded Systems

- Datacoms
- Home automation
- Medical Devices
- Transit systems

Learn more about our other ranges



HIGH RELIABILITY
WITH SUPREME
PERFORMANCE



INNOVATIVE
DESIGNS FOR
EASY ASSEMBLY



DEPENDABLE
CONNECTIVITY
ACROSS THE BOARD

Find out more about our full range
of inter-connection solutions at

www.harwin.com

HRI
RANGE

EZI
RANGE

BBi
RANGE

Get Help from a Harwin Expert

Our experts are specialists in their field with many years of experience in their respective roles and industries.

Find an expert that can help you with your enquiry.

[Click Here >>](#)

CAD Models and Evaluation Samples also available at www.harwin.com



Contact Us

Europe, Middle East & Africa

T: +44 (0)23 9231 4545

E: technical@harwin.com

Americas

T: +1 603 893 5376

E: technical-us@harwin.com

Asia Pacific

T: +65 6 779 4909

E: technical-asia@harwin.com

WWW.HARWIN.COM